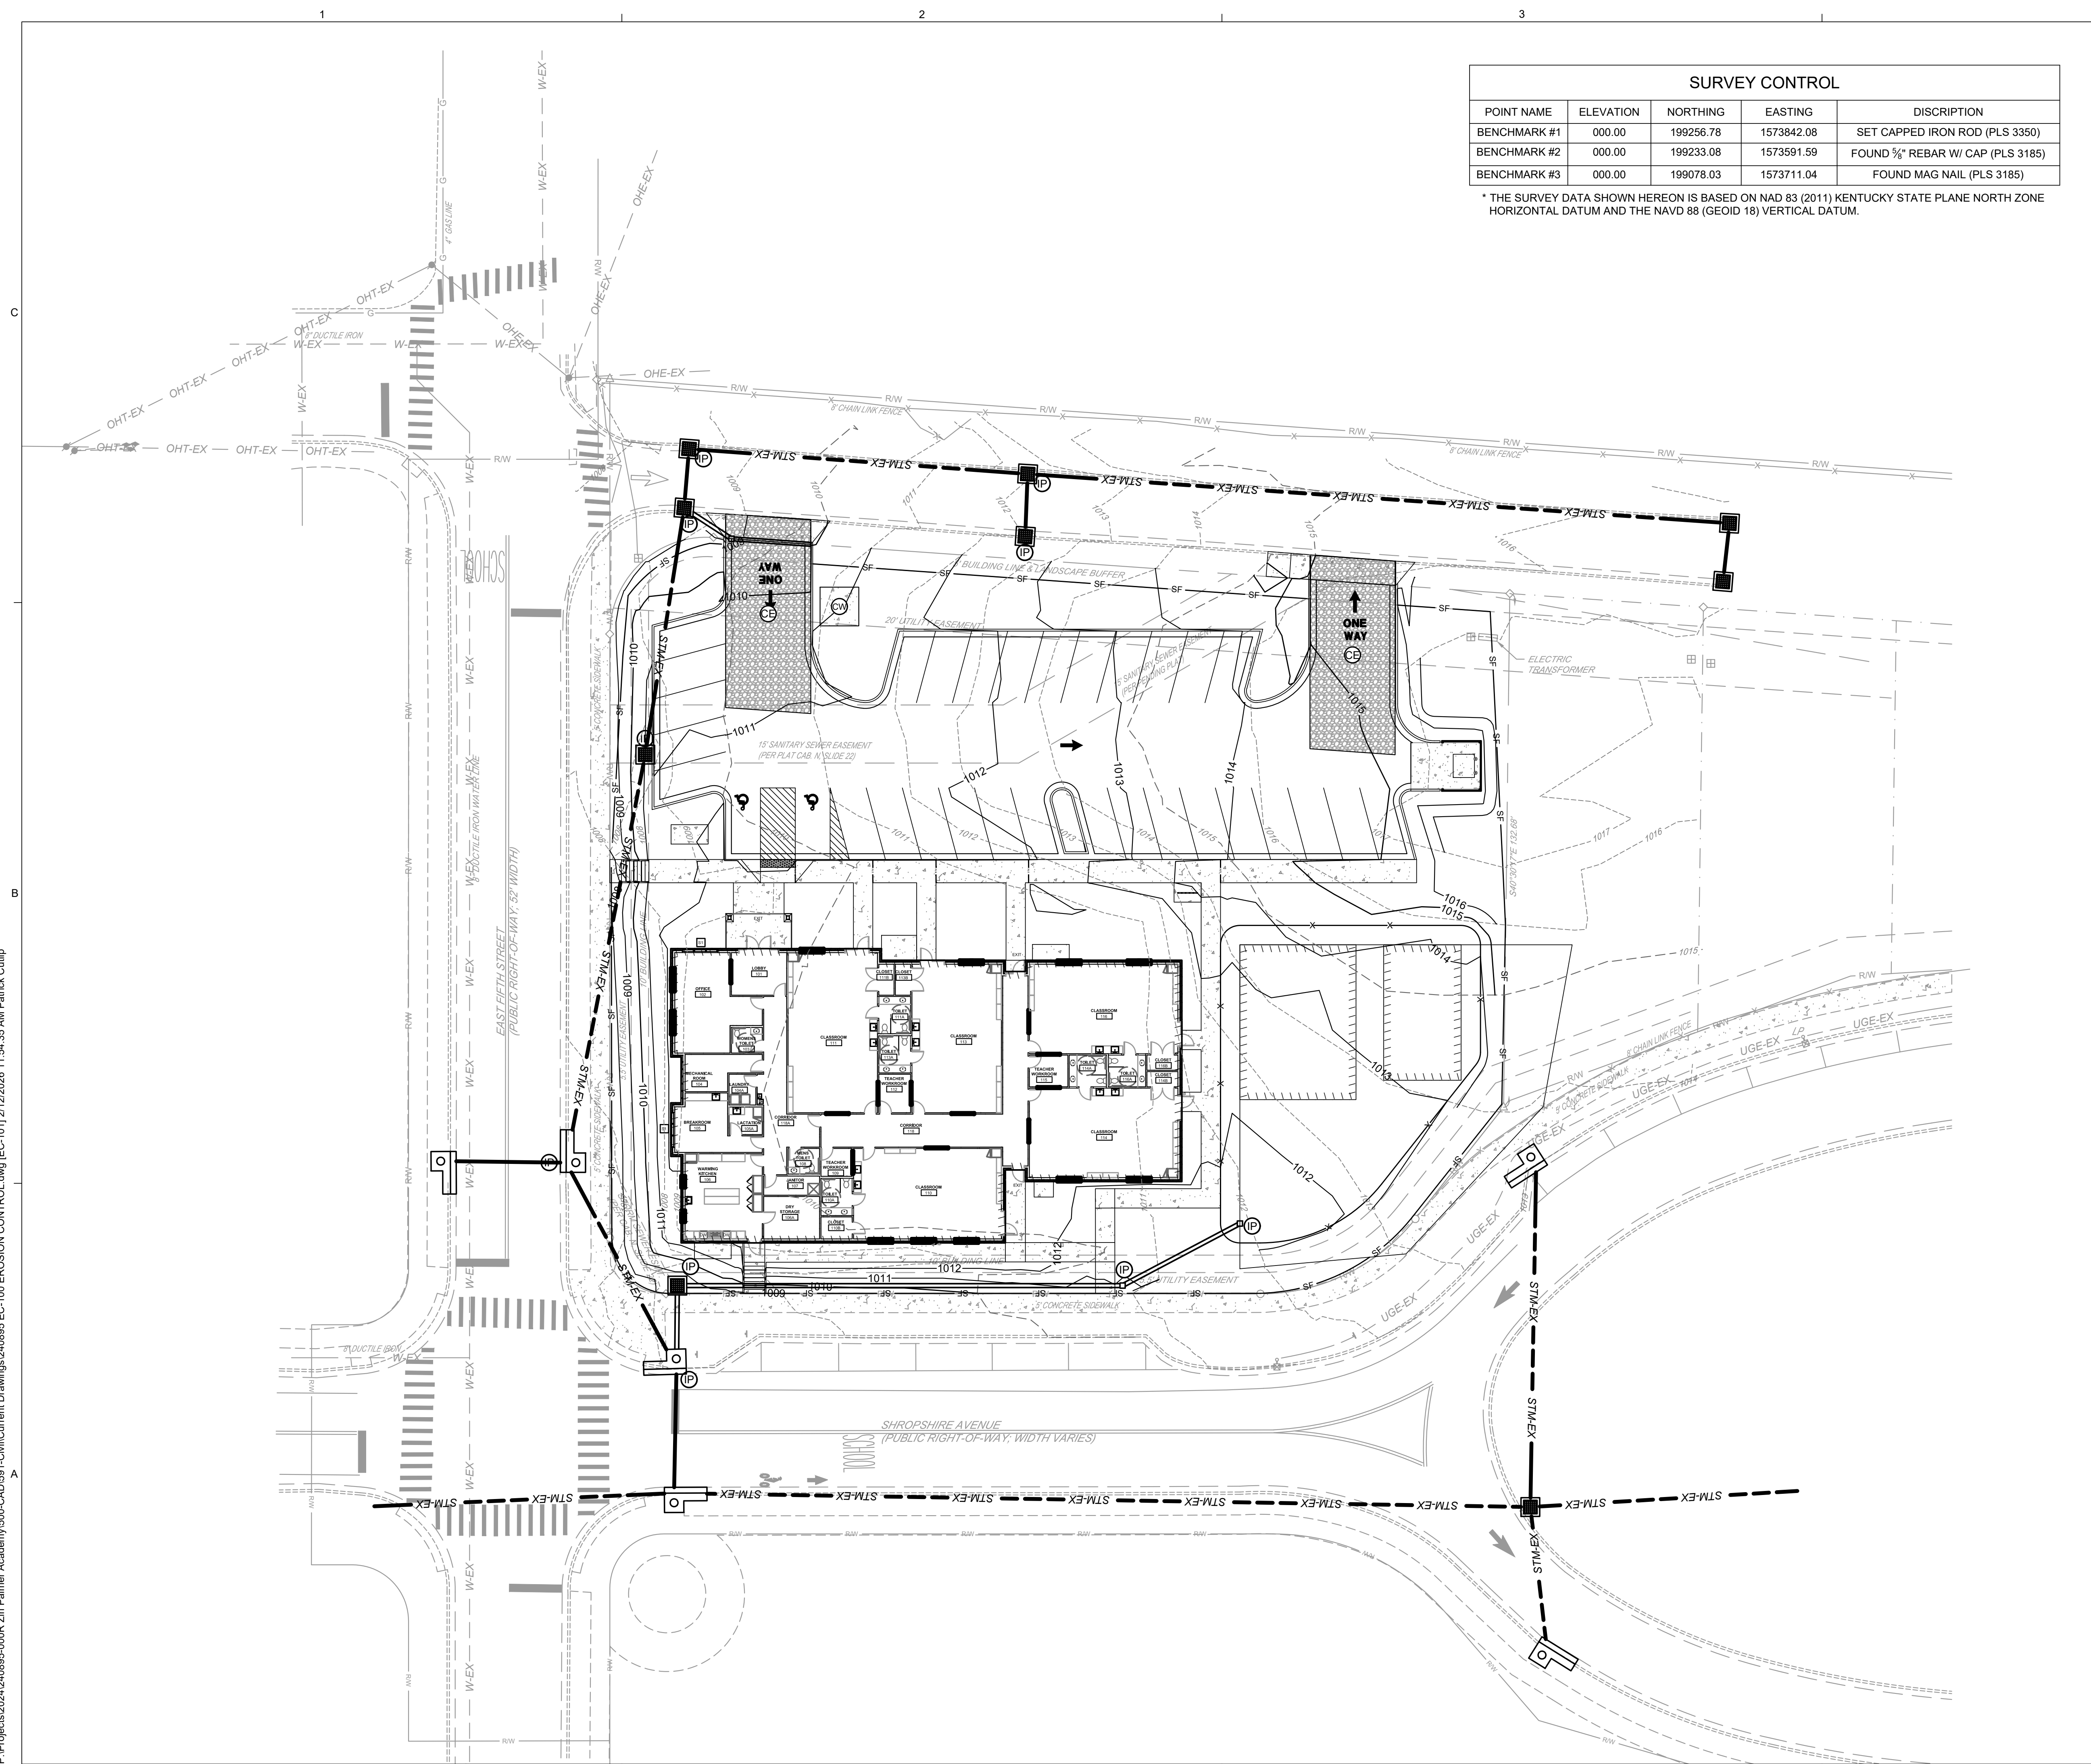




SURVEY CONTROL				
POINT NAME	ELEVATION	NORTHING	EASTING	DISCRPTION
BENCHMARK #1	000.00	199256.78	1573842.08	SET CAPPED IRON ROD (PLS 3350)
BENCHMARK #2	000.00	199233.08	1573591.59	FOUND ¾" REBAR W/ CAP (PLS 3185)
BENCHMARK #3	000.00	199078.03	1573711.04	FOUND MAG NAIL (PLS 3185)





* THE SURVEY DATA SHOWN HEREON IS BASED ON NAD 83 (2011) KENTUCKY STATE PLANE NORTH ZONE HORIZONTAL DATUM AND THE NAVD 88 (GEOID 18) VERTICAL DATUM.

KPDES NOI INFORMATION

AREA OF SITE: 1.46 ACRES
AREA OF DISTURBANCE: 1.46 ACRES
LAT: 00° 00' 00"N
LONG: 00° 00' 00"W

RECEIVING WATER BODY:

MAP LEGEND

- | | |
|---|----------------------------------|
|  | BUILDING LINE |
|  | PROPERTY LINE |
|  | TOP OF BANK |
|  | EXISTING CONTOUR |
|  | PROPOSED CONTOUR |
|  | SILT FENCE |
|  | INLET PROTECTION |
|  | CONCRETE WASHOUT |
|  | CONSTRUCTION ENTRANCE |
|  | PROPOSED BUILDING |
|  | TEMP. OUTLET HEADWALL PROTECTION |

SITE BMP PLAN

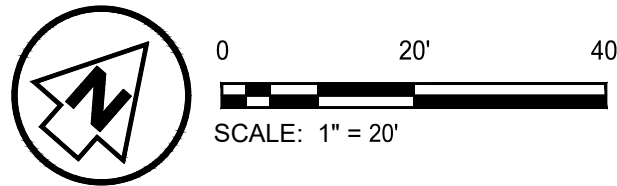
THE PHASES LISTED BELOW AND CONTROLS SHOWN ON PLANS ARE A GENERAL OVERVIEW AND MAY BE ADJUSTED IN THE FIELD DUE TO CONSTRUCTION ACTIVITIES AND CONSTRUCTION MEANS AND METHODS.

PHASE I - BMP PLAN (CLEARING & GRUBBING; MASS GRADING). ERECT EROSION CONTROL FENCE ALONG THE DOWNGRADE EDGE OF THE PROPERTY CONSTRUCTION ENTRANCE MAY NEED TO BE RE-LOCATED AS CONSTRUCTION PROGRESSES. CONTRACTOR MAY MARKUP NEW LOCATION AND DATE THE CHANGE ON A PAPER COPY OF THE BMP PLAN ONSITE.

PHASE II - BMP PLAN (ROUGH GRADING, ROUGH-IN OF ROADWAYS, UNDERGROUND UTILITIES AND SEWERS WORK). DURING THIS PHASE OF CONSTRUCTION ACTIVITIES, SILT FENCES SHALL BE REMOVED, RELOCATED, AND OR ADDED AS CONSTRUCTION PROGRESSES. CONTRACTOR MAY MARKUP NEW LOCATION AND DATE THE CHANGE ON A PAPER COPY OF THE BMP PLAN ONSITE. MAINTAIN THE SILT FENCE ALONG THE PROPERTY PERIMETER. INSTALL UNDERGROUND UTILITIES AND SEWERS USING CORRECT LINEAR BMP MEASURES. ROUGH IN PARKING LOT AND BUILDING GRADE.

PHASE III - BMP PLAN (ROAD AND SITE PREPARATION). MAINTAIN THE SILT FENCES ALONG THE DOWN GRADE PERIMETER. SEED AND STRAW A 10' BUFFER ALONG ROADWAYS AFTER CURB HAS BEEN INSTALLED. WHERE NORMAL SEED AND STRAW METHODS ARE INEFFECTIVE, OR ON SLOPES 3:1 OR STEEPER, INSTALL EROSION CONTROL MATTING, 6 MONTH LONGEVITY. INSTALL INLET PROTECTION.

PHASE IV - BMP PLAN (FINAL CONSTRUCTION).
REMOVE SILT FENCE AND OTHER CONTROLS THAT
ARE INHIBITING FINAL CONSTRUCTION AND IS NO
LONGER NEEDED. RELOCATE SILT FENCE AS
NECESSARY. CONTRACTOR MAY MARKUP NEW LOCATION
(AND/OR AREAS OF SILT FENCE REMOVED) AND DATE
THE CHANGE ON A PAPER COPY OF THE BMP PLAN
ONSITE. INSTALL CONCRETE WASH OUT PIT, FINAL
LOCATION MAY VARY BASED ON TRADES.
CONTRACTOR MAY MARKUP NEW LOCATION AND
DATE THE CHANGE ON A PAPER COPY OF THE BMP
PLAN ONSITE. FINISH CONSTRUCTION OF THE
BMP. DISPERSE REMAINING DISTURBED AREAS
WITH ANY REMAINING EROSION CONTROL MEASURES AND
PROTECT ANY REMAINING DISTURBED AREAS WITH
SEED AND STRAW.



PRIME ADVANTAGE

651 PERIMETER DRIVE, SUITE 300
LEXINGTON, KENTUCKY 40517
859.368.0145

www.primeeng.com

ZIRL PALMER ACADEMY

461 E FIFTH ST
LEXINGTON, FAYETTE COUNTY, KY 40508

COMMUNITY ACTION
COUNCIL

710 W HIGH ST
LEXINGTON, KY 40508

DATE : 02/11/2026
PROJECT NO. : 240895
DESIGNED BY : PDC
DRAWN BY : PDC
SCALE : AS NOTED

[illegible]

THIS DRAWING NOT RELEASED FOR
CONSTRUCTION UNLESS SO NOTED ABOVE

SHEET TITLE

EROSION CONTROL PLAN



EC-101

S H E E T

LIC. No.

DATE: