


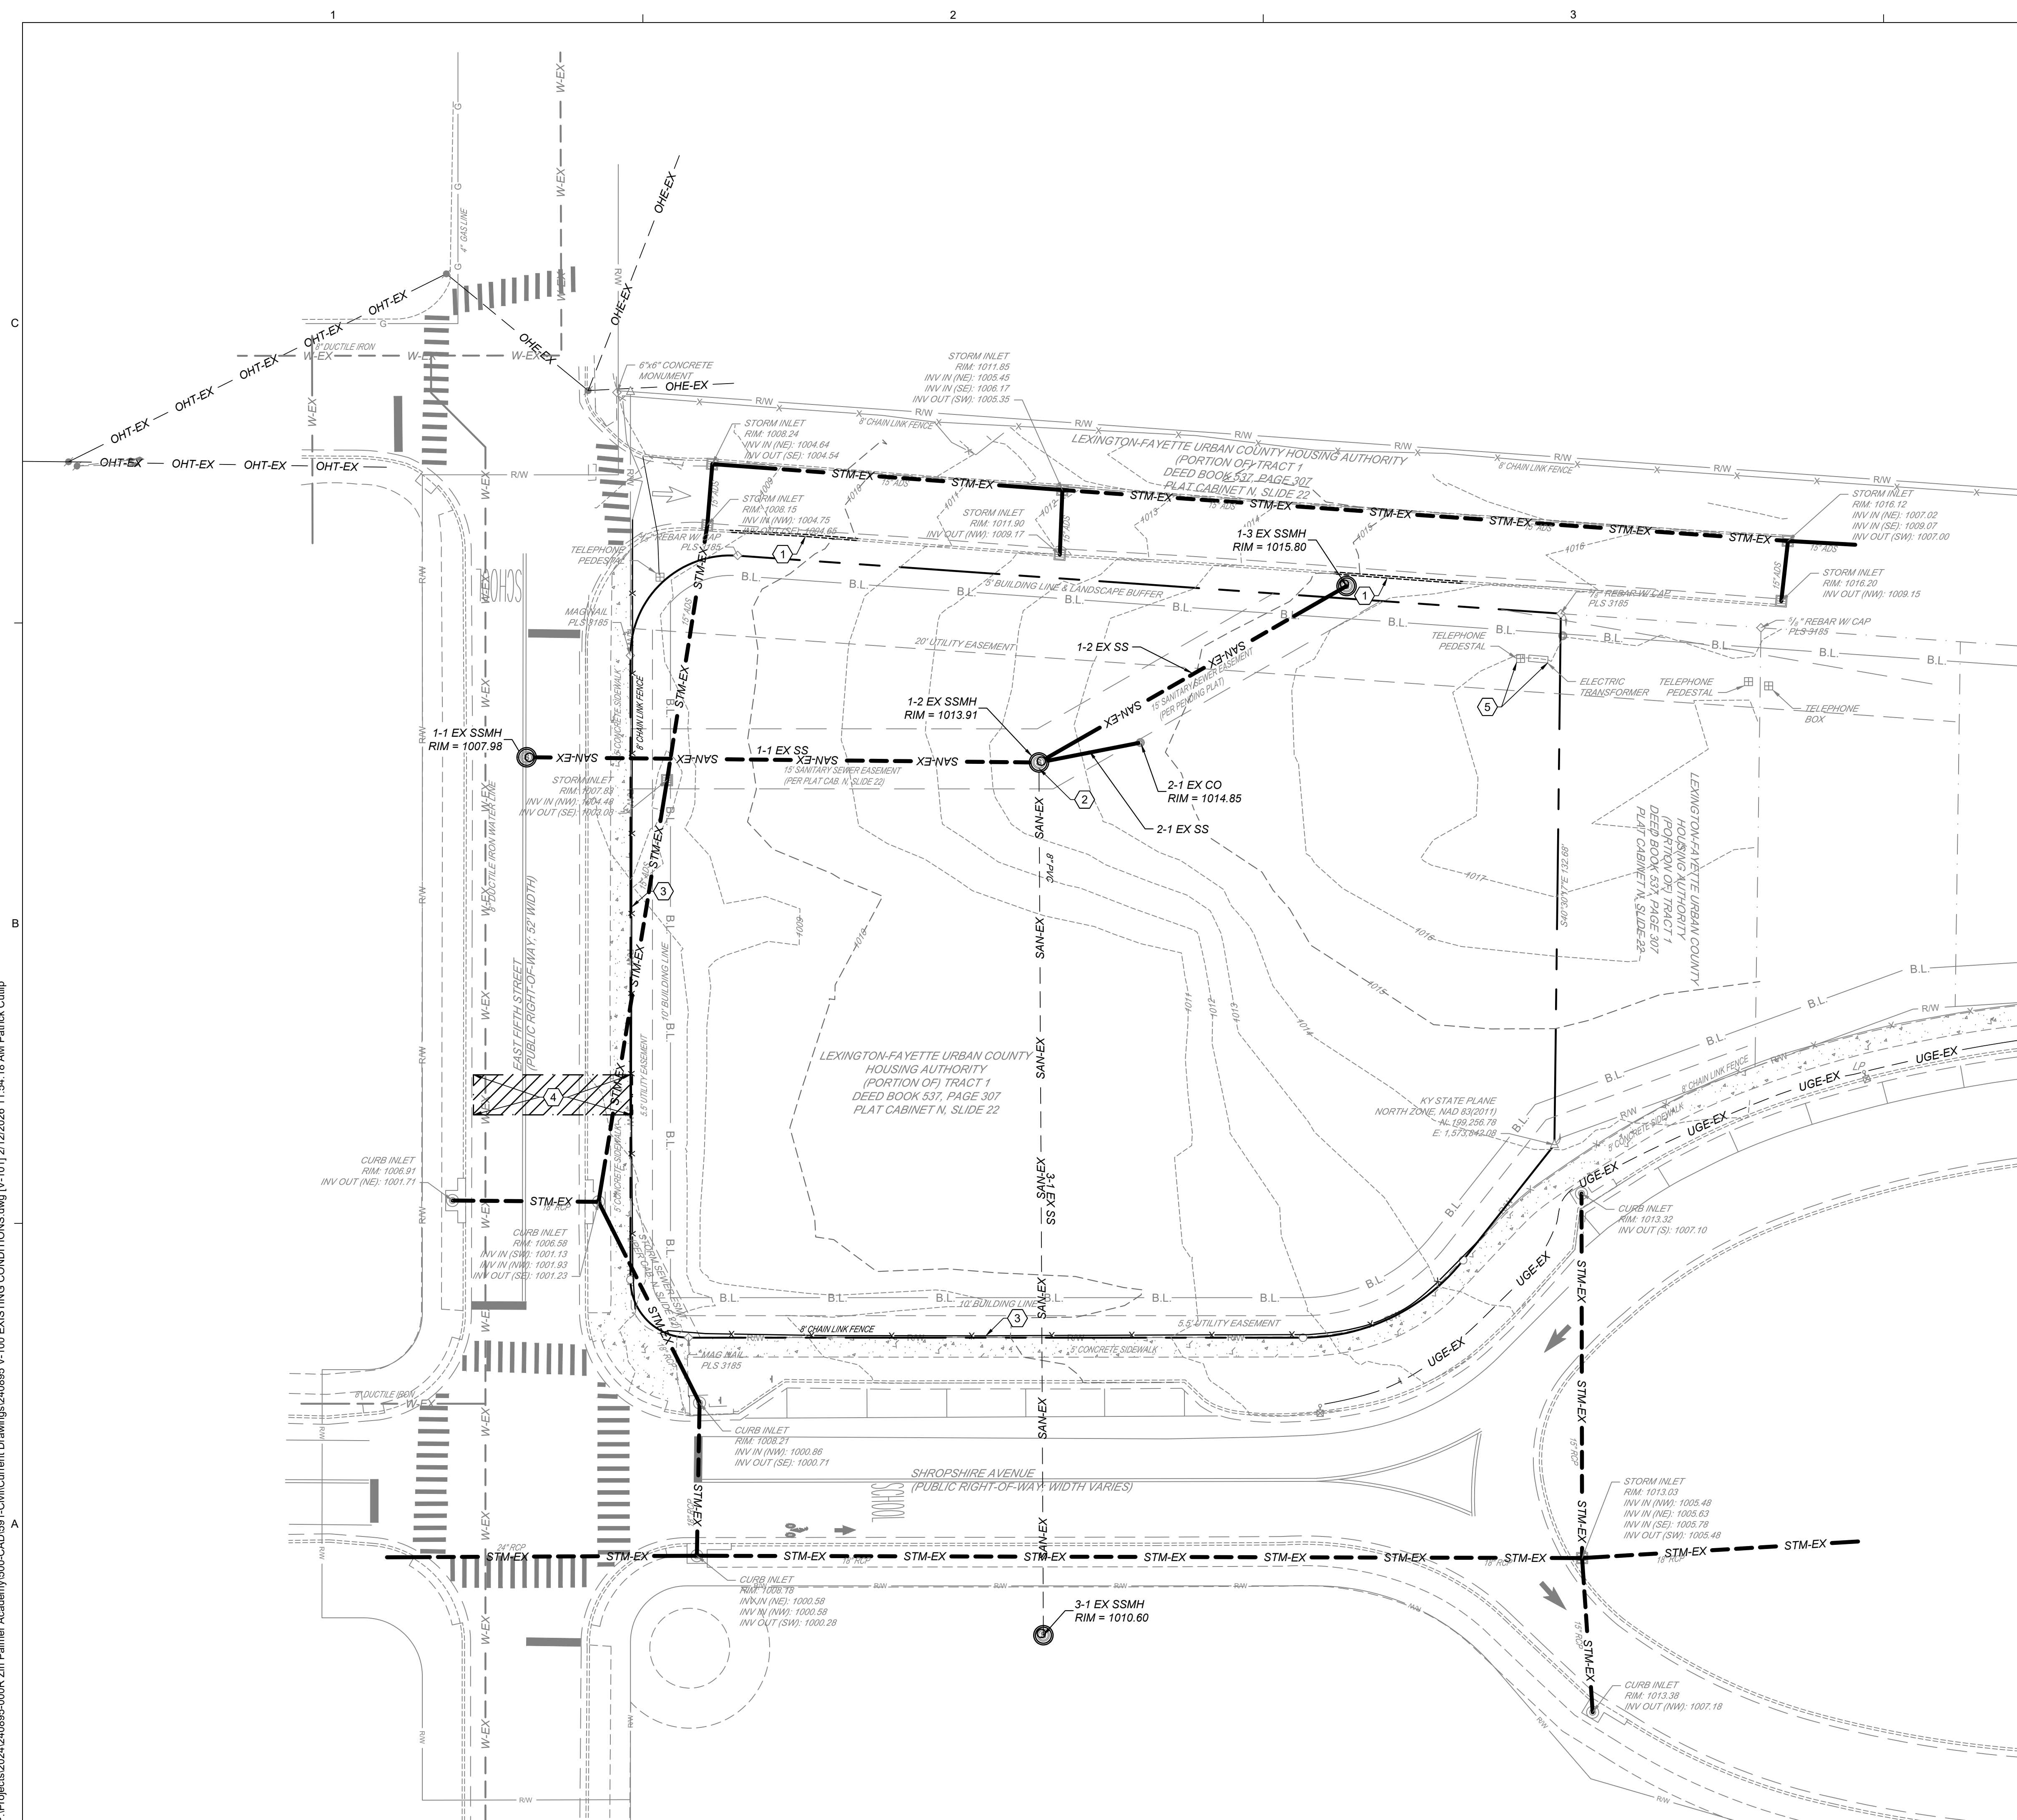

MAP LEGEND

- | | |
|---|---|
|  | FOUND MONUMENT |
|  | AS NOTED ON SURVEY |
|  | SURVEYOR'S CAP (SET, PLS 3350) |
|  | MAG NAIL WITH ID TAG
(SET, PLS 3350) |
|  | CONTROL POINT / BENCHMARK |
|  | STREET LIGHT (LP) |
|  | POWER POLE (PP) |
|  | TELEPHONE POLE (TP) |
|  | FIRE HYDRANT (FH) |
|  | WATER VALVE (WV) |
|  | WATER METER (WM) |
|  | GAS METER (GM) |
|  | GAS VALVE (GV) |
|  | ELECTRIC METER (EM) |
|  | LIGHT POLE (LP) |
|  | POST INDICATOR VALVE (PIV) |
|  | CLEAN OUT (c/o) |
|  | STORM MANHOLE |
|  | SANITARY MANHOLE |
|  | SIGNS |
|  | CHAIN LINK FENCE |
|  | WATER LINE |
|  | GAS LINE |
|  | OVERHEAD ELECTRIC |
|  | OVERHEAD TELEPHONE/CABLE |
|  | UNDERGROUND ELECTRIC |
|  | UNDERGROUND TELEPHONE/CABLE |

DEMOLITION KEYNOTES

KEYNOTES APPLY TO ALL DEMOLITION SHEETS

1. SAW-CUT EXISTING CURB AND GUTTER.
2. PLUG EXISTING SANITARY LINE INLET 3-1 EX SS TO 1-2 EX SSMH.
3. REMOVE EXISTING FENCE.
4. CUT EAST 5TH STREET & SIDEWALK FOR WATER LINE TAP AND SERVICE LINE INSTALLATION. REPAIR DEMO'D STREET AND SIDEWALK PER LFUGC REQUIREMENTS.
5. CONTRACTOR TO CONFIRM IN FIELD AND WITH ELECTRIC COMPANY IF EXISTING TRANSFORMER ON SITE IS ACTIVE. IF EXISTING TRANSFORMER IS INACTIVE, DEMO AND REMOVE FROM SITE. NEW TRANSFORMER PAD TO BE PLACED PER THE SITE UTILITY PLANS, C-401, WITH COORDINATION WITH MEP PLANS. IF TRANSFORMER IS ACTIVE FOR NEIGHBORING PROPERTIES, CONTRACTOR TO CONTACT CIVIL AND MEP ENGINEERS AND OWNER FOR COORDINATION AND NEXT STEPS.


DATE : 02/11/2026
PROJECT NO. : 240895
DESIGNED BY : PDC
DRAWN BY : PDC
SCALE : AS NOTED

[illegible]

THIS DRAWING NOT RELEASED FOR
CONSTRUCTION UNLESS SO NOTED ABOVE

SHEET TITLE

EXISTING CONDITIONS & DEMOLITION PLAN

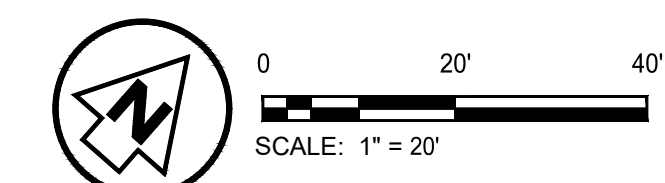

V-101

LIC. No.
DATE:

SHEET